





- 1 Dovetail guide
- 2 Protection against unhooking
- 3 For GH connector nails or GH screws
- 4 Conical guide, tightens
- 5 Cutting radii

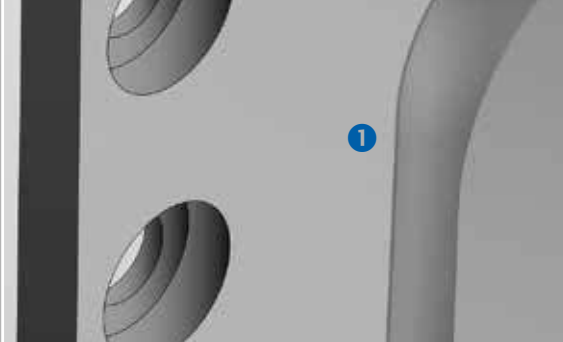

TOP UV TIMBER-TO-TIMBER CONNECTOR

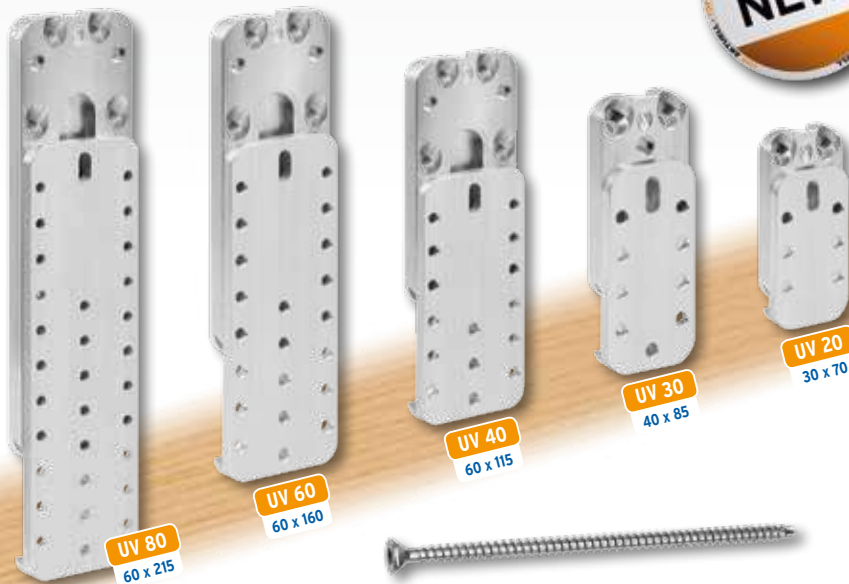

UV fully-threaded screw \varnothing 6.0 x 100 - 6.0 x 200



GH TOP UV

2-piece aluminium connector with protection against unhooking and dovetail guide

Advantages:

- Concealed dovetail connection
- Joints between secondary members made of timber on timber; concrete; masonry; steel with concrete screws
- Chemical anchor studs, metric screws
- Can be loaded in up to 4 directions
- With protection against hooking for all jointing options
- Fast installation of the secondary member
- Connector tightens due to conical sliding surfaces
- Connection can be dismantled as required
- Protection against unhooking
- The load-bearing capacity is determined by the number of screws in the main member (HT) and the screw length in the NT
- 2 connectors² next to each other = double load-bearing capacity

¹ UVB 40, UVB 60 and UVB 80

² \geq 15.0 mm

TOP UVB TIMBER-TO-CONCRETE CONNECTOR¹



Protection against unhooking